




GEOQUEST



TerraTextile
Woven Monofilament_{PP}

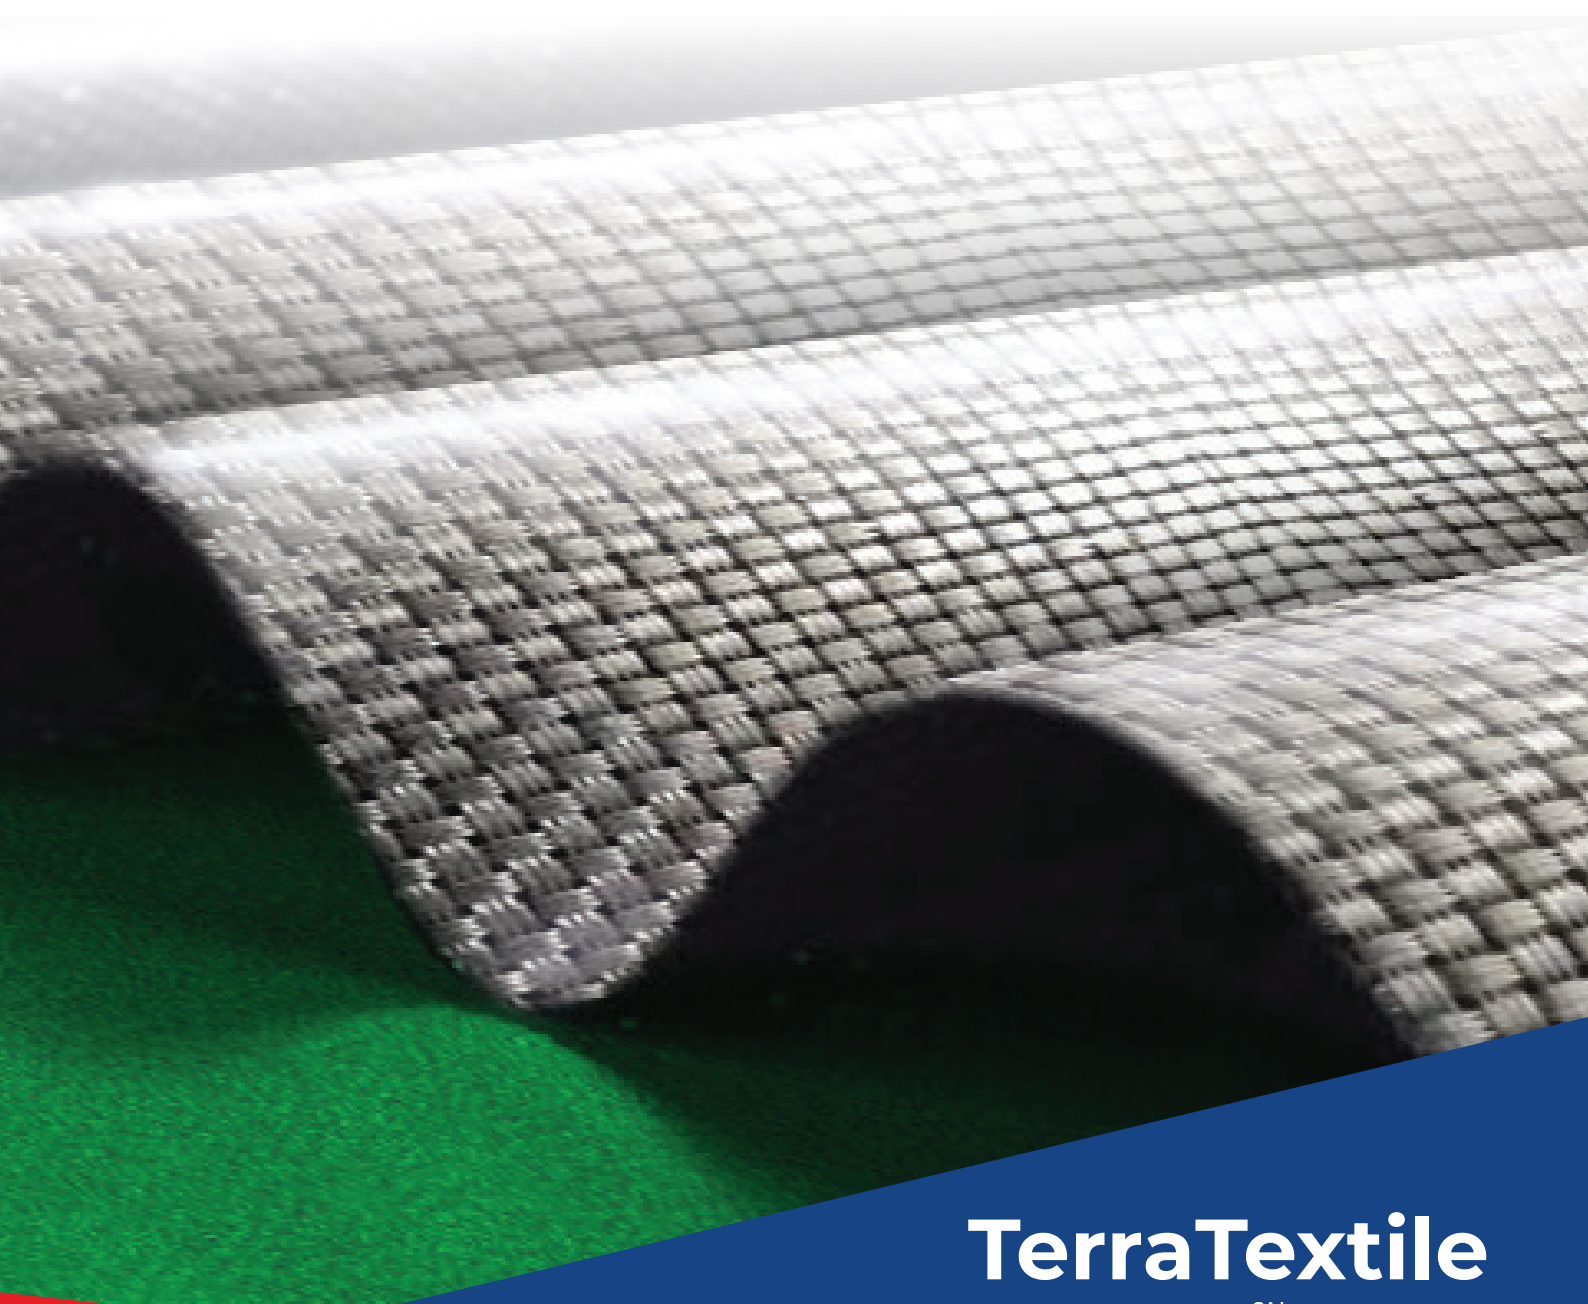

TerraTextile – W Mo_{pp} holds a higher strength to weight ratio in comparison with non-woven needle-punched geotextiles. It provides excellent filtration, separation, and erosion control characteristics. TerraTextile – W Mo_{pp} has very good pore size consistencies, apparent opening sizes (AOS), high water flow properties whilst maintaining high dimensional stability and consistent hydraulic performance.

Applications

- **Erosion Control:** TerraTextile – W Mo_{pp} acts as a separation and retention layer for all waterfronts exposed to high dynamic waves and currents, and those exposed to rapid drawdown

conditions. The high filtration characteristic of the product is well utilized under such extreme conditions.

- **Separation and Stabilisation:** The high strength property of TerraTextile – W Mo_{pp} provides stabilisation over soft or poorly drained soils. It helps to restrict pumping of soil into the gravel, which would otherwise drastically reduce the load carrying capacity of the sub grade. The stabilisation application of this TerraTextile acts jointly with the function of separation.
- **Silt Fence:** TerraTextile – W Mo_{pp} acts as a temporary barrier to mitigate silt and other sediment from polluting nearby streams, rivers and sensitive environments.
- **Landfills:** TerraTextile – W Mo_{pp} can be used as capping for waste landfill.

Technical Parameters

Properties	Test Method	Unit	TW-Mo _{pp} 404	TW-Mo _{pp} M706	TW-Mo _{pp} 220	TW-Mo _{pp} 330	TW-Mo _{pp} 440	
Minimum Average Roll Valueⁱ								
Mechanical Properties								
Wide Width Tensile Strength at break	MD ^{iv}	ASTM D 4595	kN/m	45	39.4	38.5	52.5	70
	CD ^v	ASTM D 4596	kN/m	30	33.6	35.9	48.2	70
Wide Width Elongation	MD ^{iv}	ASTM D 4595	%	25	30	10	10	10
	CD ^v	ASTM D 4596	%	15	15	10	10	10
Grab Tensile Strength	MD ^{iv}	ASTM D 4632	kN	1.62	1.65	1.31	2	2.1
	CD ^v	ASTM D 4632	kN	0.89	1.11	1.16	1.55	1.96
Grab Elongation	MD ^{iv}	ASTM D 4632	%	15	15	15	15	15
Trapezoid Tear	MD ^{iv}	ASTM D 4533	kN	0.51	0.45	0.56	0.8	0.8
CBR Puncture Resistance		ASTM D 6241		3.0	4.28	5.7	6.22	8.89
Hydraulic Properties								
Permittivity		ASTM D 4491	sec ⁻¹	2.1	0.28	0.6	0.52	0.4
Water Flow Rate		ASTM D 4491	l/m ² /s	98.45	12.21	21.2	21.2	20.4
Maximum Apparent Opening Size (AOS) ⁱ		ASTM D 4751	μ	425	212	600	600	600
UV Resistance at 500 hrs		ASTM D 4355	%	90	90	80	80	80
pH Range		ASTM D2165-94		2-13				
Standard Packaging								
Roll width ⁱⁱ			m	3.81		4.57		
Roll Length ⁱⁱ			m	91.33		91.25		
Estimated Roll Area ⁱⁱⁱ			m ²	348		417		

ⁱAll the values mentioned are of minimum average roll values (MARV) except for apparent opening size (AOS) which is maximum average roll value (MaxARV)

ⁱⁱThese values are subject to ±1% variation possible

ⁱⁱⁱOther roll sizes also available

^{iv}MD - Machine Direction

^vCD - Cross Machine Direction

NOTES

- These properties may change at the time of handling, storage and shipping.
- Other grades and polyester material also available as per requirement.
- The values can be customized.
- The above values are subject to change as per discretion of the company.

info@geoquest-asia.com | www.geoquest-asia.com

Local Contact:

Disclaimer. Geoquest assumes no liability for the accuracy and completeness of this information or for the ultimate use by the purchaser. Geoquest disclaims any and all express, implied, or statutory standard, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, material, or information furnished herewith. This document should not be constructed as engineering advice.

Copyright © 2022. All Rights reserved

June, 2022